


NOW STOCKING

Modern Ventilated Panel Doors



The biggest difference between a classic louver door and a Modern Ventilated Panel door? Rather than a vented door with narrow style louvered slats, Modern Ventilated Panel doors feature CNC-routed slots that go through the door and sit flush with the flat panel surface. The angled slots provide necessary air flow without compromising visual privacy. And the routed design actually makes the doors easier to paint and to clean.

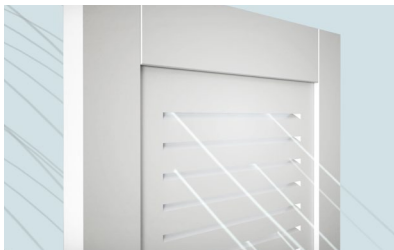

LIMITED
LIFETIME
WARRANTY

- **EXCELLENT PERFORMANCE**
More than 2x airflow of other modern routed louver doors
- **VENTILATION WITH ELEVATED STYLE**
CNC-routed slots for airflow, maintaining privacy; easier to paint and clean.
- **CLEAN LINES & MODERN LOOK**
- **DURABLE AND TEMPERATURE-RESISTANT**
Made from MDF material, resistant to expansion, contraction, warping, cracking, and splitting. Features stile and rail dowel construction for added strength.
- **CUSTOM MACHINING & LOCKSETS**
Manufactured in the U.S. with options for custom machining and commercial locksets.
- **IDEAL FOR VARIOUS SETTINGS**
Suitable for single-family homes, multifamily units, and commercial spaces, meeting air flow building codes (check your local building/planning office for air flow code requirements).
- **LIMITED LIFETIME WARRANTY**
Backed for long-lasting durability.



K-6000
1-PANEL VENT




K-4010
2-PANEL VENT/VENT

ABS In-Stock Sizes

Height	6'8"
Widths	2'0", 2'4", 2'6", 2'8", and 3'0"
Thickness	1-3/8"

See reverse side for more details >

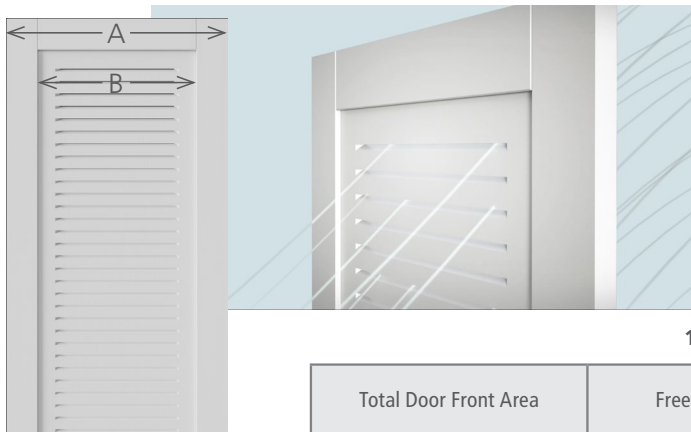

AIRFLOW PERFORMANCE

1-PANEL - VENT DIMENSION TABLE

Door Width			Total Door Front Area	Free Air Opening	Free Air Opening to Door Size	Obstructed Air Opening to Door Size
	A	B	6/8	6/8	6/8	6/8
3/0	36"	27"	20.00 ft ²	1.64 ft ²	8.20%	91.80%
2/8	32"	23"	17.78 ft ²	1.34 ft ²	7.54%	92.46%
2/6	30"	21"	16.67 ft ²	1.19 ft ²	7.14%	92.86%
2/4	28"	19"	15.56 ft ²	1.05 ft ²	6.75%	93.25%
2/0	24"	15"	13.33 ft ²	0.75 ft ²	5.63%	94.37%

2-PANEL - VENT/VENT DIMENSION TABLE

Door Width			Total Door Front Area	Free Air Opening	Free Air Opening to Door Size	Obstructed Air Opening to Door Size
	A	B	6/8	6/8	6/8	6/8
3/0	36"	27"	20.00 ft ²	1.35 ft ²	6.75%	93.25%
2/8	32"	23"	17.78 ft ²	1.11 ft ²	6.24%	93.76%
2/6	30"	21"	16.67 ft ²	0.98 ft ²	5.88%	94.12%
2/4	28"	19"	15.56 ft ²	0.86 ft ²	5.53%	94.47%
2/0	24"	15"	13.33 ft ²	0.62 ft ²	4.65%	95.35%



Scan here to see the door in action!

abs-abs.com

©2025 American Building Supply. All rights reserved. American Building Supply is proud to be part of the JELD-WEN global family of product brands and companies. 25-99501 0225

Contact your local ABS sales representative for more details.